

Net2 - I/O board

System specifications

Inputs 4 4 Relay outputs

Electrical

10V - 24V DC Operating Voltage Current consumption 400mA Relay contact current rating 13A 4kV AC Relay contact isolation Relay contact voltage 240V AC 50Hz Relay contact frequency

Communication

Yes (Maximum 200 including other ethernet devices - Net2 Plus, I/O Boards TCP/IP

No Wireless RS485

Ethernet network speed 100Mbit/s auto MDIX

Ethernet bandwidth requirement 200 khits/sec

DHCP support (fixed IP recommended)


Yes

-20°C - +55°C -4°F - +131°F Operating temperature

Moisture resistance No - if used externally, it must be

protected in a weatherproof housing


Vandal Resistance Low

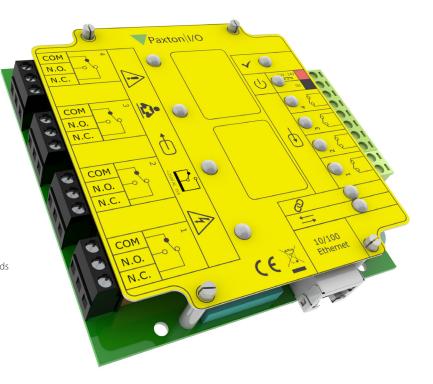


The Net2 I/O board is simple, yet powerful addition to the Net2 system. It can be wired alongside a Net2 door controller, to switch power on and off to electrical equipment to save money and energy. The board can control lighting, heating, water and air conditionoing by using the triggers and actions application in the Net2 software. These actions can be programmed for a particular time, or in response to a specific Net2 event.

The Net2 I/O board consists of 4 inputs and 4 outputs. It connects directly to a LAN/WAN via an onboard RJ45 connector and can be distributed around a building as required. The I/O board can be supplied as PCB only, in a plastic housing or mounted within a 2A boxed plastic mains monitored backup power supply.

Please note, I/O boards work as part of the Net2 system. They are not door controllers.

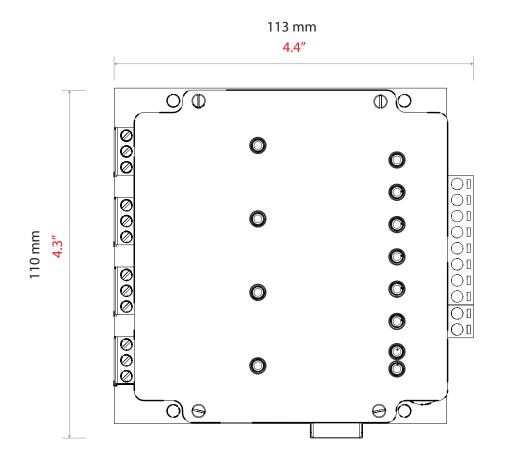



Accessories and sales codes

Net2 - I/O board

489-710

Net2 - I/O board with Plastic housing

385-710

Net2 - I/O board, 12V 2A PSU with Plastic cabinet

411-623